


TT250/TT500

TACK DISTRIBUTOR

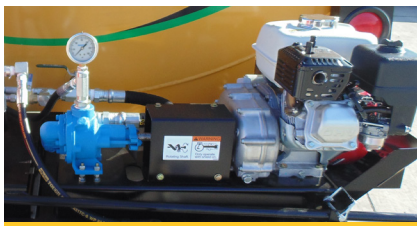

POWER TO PUMP.

Weiler tack distributors are powered by a 5.5 hp (41 kW) Kohler engine with electric start option. The direct-drive pump is designed for asphalt with a capacity of 15 gpm (57 L/min).



HIGH BTU BURNER.

The 300,000 BTU burner provides quick heating times. Dual propane tanks provide extended use between changes and the push button ignitor simplifies the lighting process.




SPRAY WAND.

The 5' 6" (1.7 m) spray wand and 50' (15 m) hose reel provide optimal coverage range for tight jobsites.



FOLD-ABLE SPRAY BAR.

The optional spray bar folds from 6' (1.8 m) to 9' (2.7 m) and features 7 independently controlled nozzles for optimal coverage. The optional wireless remote for the spray bar allows operation away from the machine.

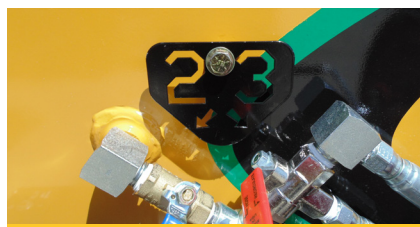

SIMPLE OPERATION.

Numbered valves and valve operation decals clearly specify machine setup for warmup/recirculation, spray, reclaim and cleanout operations.



HEAVY DUTY TRAILER.

4,000 lb (1815 kg) GVWR trailer for the TT250 and 7,200 lb (3447 kg) GVWR trailer for the TT500 feature either ball or pintle hitch, electric brakes, emergency break-away brake system, safety tow chains and pre-wired 6-pin connector.

TT250/TT500 SPECIFICATIONS

TT250 CAPACITY	250 gal	946 L
TT250 SHIP WEIGHT	1,850 lb	839 kg
TT250 WORK WEIGHT	4,000 lb	1814 kg
TT250 HEIGHT	80"	2032 mm
TT250 LENGTH	10'	3048 mm
WIDTH	78"	1981 mm

TT500 CAPACITY	500 gal	1892 L
TT500 SHIP WEIGHT	2,900 lb	1315 kg
TT500 WORK WEIGHT	7,200 lb	3266 kg
TT500 HEIGHT	86"	2184 mm
TT500 LENGTH	14'	4267 mm
WIDTH	78"	1981 mm

BURNER	1 x 300,000 BTU	
ENGINE	Kohler	
HORSEPOWER	5.5 hp	41 kW
PUMP	15 gpm	57 L/min
HOSE REEL	50'	15 m
FLUSH TANK	13 gal	49 L

POWERTRAIN

5.5 hp (41 kW) Kohler engine
Electric engine start option
15 gpm (57 L/min) direct-drive asphalt pump with integral relief valve

TRAILER

4,000 lb (1815 kg) GVWR trailer for TT250
7,200 lb (3447 kg) GVWR trailer for TT500
Ball or pintle hitch equipped
Electric brakes
Emergency break-away brake system
Safety tow chains
Pre-wired with a 6-pin connector

TACK TANK

250 gal (946 L) or 500 gal (1892 L) capacity
300,000 BTU burner
20 lb (9 kg) dual propane tanks
Push button igniter
Fluid level indicator
Tack temperature gauge
DOT 406 emergency venting relief valve
Optional electric tank heater w/ adjustable temperature control

SERVICE/MAINTENANCE

13 gal (49 L) flush tank for cleaning solvent
Reclaim and cleanout functions
Removable spray nozzles

MATERIAL DELIVERY

50' (15 m) hose reel
5'6" (1.7 m) spray wand
Optional rear-mounted spray bar, adjustable 6' (1.8 m) to 9' (2.7 m)
Ball valves allow individual control of 7 spray bar nozzles
Optional wireless spray bar control remote
Tank recirculation valve
Numbered valves for simplified operation

OPTIONAL EQUIPMENT

2 5/16" (58 mm) ball hitch
Pintle hitch and ball hitch group
Spare tire and mount
Spray bar with manual valve control
Wireless remote for spray bar
Electric start
Electric tank heat

SALES AND SERVICE

Sold and serviced exclusively through Caterpillar dealers worldwide.

WARRANTY

12 months standard. Extended warranty available.