

SL 3730

DIESEL POWERED SKID STEER LOADER



TOGETHER WE BUILD





CAPACITY
728 LBS

SL-3730 SKID STEER LOADER

21 HP Yanmar Diesel Engine

COMPACT, RELIABLE, WITH PILOT OPERATED JOYSTICK CONTROLS

The key features of the new SL-3730 Skid Steer Loader. The SL-3730 is ideal for working in confined spaces with maximum flexibility. With an operating weight of 2955 lbs., the SL-3730 can handle an operating load (SAE Standard) of up to 728 lbs., with a breakout force of 1658 ft/lb. The SL-3730 Skid Steer Loader is equipped with a 21 hp. Yanmar Diesel engine, ensuring excellent performance in the most complex applications.

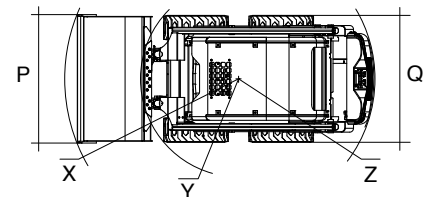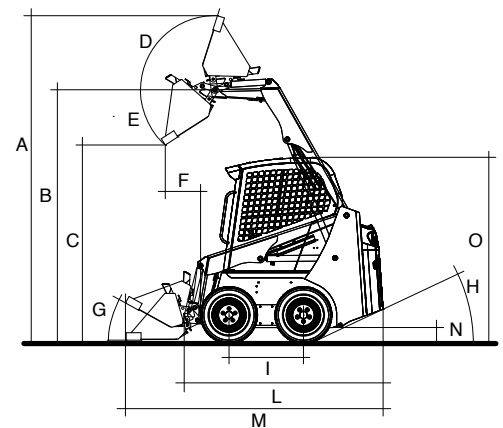

Technical specifications

SL- 3730

Operating Weight	2955 lbs
Transportation Weight	2778 lbs
SAE Load Capacity 35%	728 lbs
Tipping Load 50%	1455 lbs
Bucket Breakout Force	1658 ft/lb
Maximum Travel Speed	0-4.35 mph
Engine*	Yanmar 3TNV76
Rated Output	21hp/2,500 rpm
Battery	12V
Fuel Consumption	1.26 gal/hr
Cooling System	water cooled
Fuel Tank Capacity	2.2 gallons
Hydraulic Pressure	2610 psi
Auxiliary Flow	7.4 gpm
Standard Bucket width/capacity	13.06 cu/ft
Tires	23 - 8.50 x 12

ROPS - ROPS cage compliant with ISO 3471:1994

FOPS - FOPS cage compliant with ISO 3449:1998 Level 1

Cooling system 1 gallon

Fuel tank 5.3 gallons

Hydraulics 10.3 gallons

Hydraulics tank capacity 5.3 gallons

Sound pressure level (operator/ (external) 85 db/ 101 db

Working Ranges and Dimensions

SL- 3730

A Operating Height - Fully Raised	10'10"
B Height to Hinge Pin - Fully Raised	8'4"
C Dump Height	6'8"
D Bucket Tilt Angle	112°
E Dumping Angle at Max Height	31°
F Dump Reach - Fully Raised	1'2"
G Maximum Rollback at Ground	34°
H Departure Angle	27°
I Wheel Base Length	2'6"
L Total Length (w/o bucket)	6'7"
M Total Length	8'6"
N Minimal Ground Clearance	6"
O Overall Height	6'2"
P Bucket Width	3'2" - 3'8"
Q Crawler Width	3'1" - 3'8"
X Front Clearance Radius (with bucket)	5'1"
Y Front Clearance Radius	2'8"
Z Rear Clearance Radius	3'11"



YANMAR

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration